


Advanced Telephone Entry System

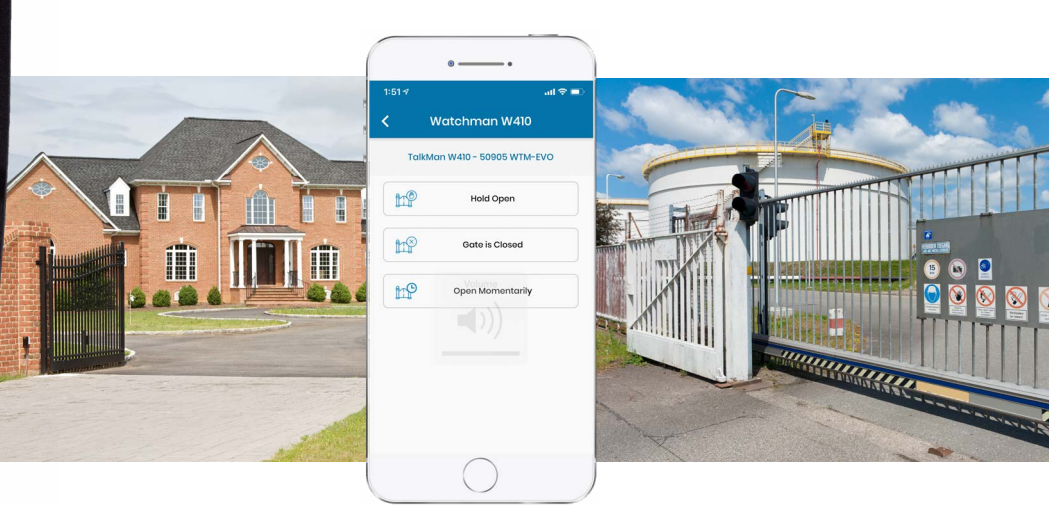

Part Numbers:

AA1TP VZN

AA1TP ATT

W410 FEATURES

- Gate can easily be controlled from app
- New low cellular plans *(with or without photos)*
- 1 native 26-bit Wiegand port
- NEW: 5,000 local codes and 64,000 non-local codes
- Cameras take photos on access attempts and on demand
- All transactions and photos stored on TrueCloud portal

W410 EXCLUSIVES

- Verizon or AT&T LTE service **No VoIP fees required*
- Calls up to 9 telephone numbers in 3 tiers
- Voice Mail Intelligence - VMI
System ignores call when reaches voice mail and continues call tree
- Prop open notification *If gate is left open more than 3 minutes*
- TrueCloud™ web portal for administration

EXCLUSIVE External Camera Options*

- Single external camera
- 4 camera options to choose from
- Pixel activated video stored on camera
- Cloud-stored still photos



*See WXP sheet for details



powered by:



*See external camera sheet for more details

W410 Advantages

- Value-priced, feature-rich price point
- **NEW:** Customer self-activation
- Choose desired rate plan (with or w/out photos)
- Convenient call group management
- Voice Mail Intelligence (VMI) = Fewer stranded visitors
- Time/date restrictions for Wiegand credentials
- Control gates/doors on demand or on a schedule
- Manage multiple devices via CellGate TrueCloud



SPECIFICATIONS

External Camera Options - limit 1 per W410

- Bullet Cameras
 - 4mm Fixed Focal Lens
 - 5-64mm Varifocal Lens
 - 2.8-12mm Varifocal Lens
- Dome Camera
 - 3-10.5mm Varifocal Lens

1 Built in Camera: 3mm

Internal Camera Angles:

- Horizontal: 120°
- Vertical: 65°

Power Consumption (12v DC):

275mA (daytime), 330mA (night)

External Camera Power Consumption:

- Bullet Cameras:
 - 4mm Fixed Focal Lens:
 - Max Consumption-Day = 180mA Night = 400mA
 - 5-64mm Varifocal Lens:
 - Max Consumption-Day = 180mA Night = 400mA
 - 2.8-12mm Varifocal Lens:
 - Max Consumption-Day = 195mA Night = 480mA
- Dome Camera
 - 3-10.5mm Varifocal Lens:
 - Max Consumption-Day = 195mA Night = 480mA

1 Wiegand Expansion Port (26 bit): 12 volt

2 Relays:

Contact rating: .5A @ 125v AC, 2A@30v DC
Switching voltage: 250v AC, 220v DC
Switching current: 2A

2 Digital inputs

IP65

Operating Temperature

-20°C - 55°C | -4°F - 131°F

Dimensions (excluding antenna)

Height- 8.3" (211mm)
Width- 6.4" (163mm)
Depth- 5.5" top (140mm), 4.7" bottom (120mm)

Cellular Technology/Networks

4G/LTE: Verizon and AT&T

Included in box

- Watchman W410
- Power supply - 5A
- Magnetic switch
- Installation manual & user manual

Antenna Options

- L-bracket
- Directional panel

Dealer Benefits

- Easy 6-wire installation
without external camera
- End-to-end support
- Cellular carrier and signal strength verification
- Ships with live SIMs
- Easy system and feature testing





Web Portal

Manage All Your CellGate Devices on One Dashboard

- Hosted by Microsoft Azure
- Event logs of all transactions
- Photos with access transactions (with photo rate plan)
- Create access credentials with date/time restrictions
- Manage push notifications
- Administrative login privileges

Cellgate App

- **NEW:** User can create access codes from the app
- Gate/doors can be opened or held open from anywhere
- Take photos on demand from internal and external cameras (with photos rate plan)
- Review historical photo and access credential use info
- Receive prop-open notifications w/ gate status

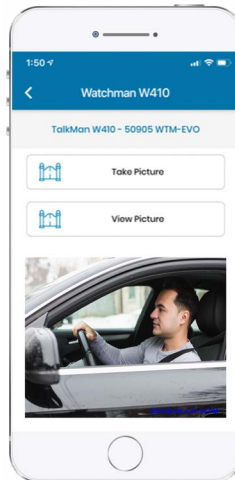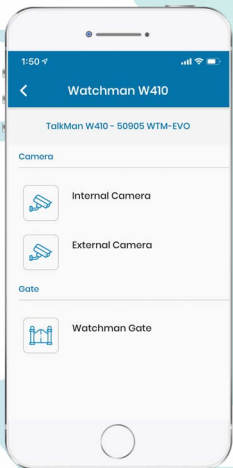

App Available at
App Store and Google Play

